


MULTILIFT XR21S

XR POWER RANGE HOOKLIFTS

Technical data

Type	XR21S UNI				
Vehicle type	4 axle				
GVW of the vehicle (t)	32				
Capacity (t)	26				
Model	XR21S.54U	XR21S.57U	XR21S.60U	XR21S.62U	XR21S.64U
G-length	54	57	60	62	64
System weight (kg) *	2720	2750	2780	2800	2840
Tipping angle (°)	53	53	53	49	46
LR = Body length (min - max) (m) internal	4,5 - 6,4	4,5 - 6,6	4,7 - 6,9	4,9 - 7,1	5,1 - 7,3
SL = Subframe length (mm) **	6563	6563	6563	6733	6783
B = Centre of gravity (mm)	3020	3100	3150	3300	3400
G = Exact G-length (mm)	5460	5660	5980	6180	6430
HM = Horizontal movement (mm)	1100	1300	1450	1450	1450
Max. operating pressure (MPa)	30				
Recommended oil flow (l/min)	100				
t = Min. free tunnel height (body) (mm)	0				
h = Installation height (mm)	370				
HH = Hook height (mm)	1450-1720				

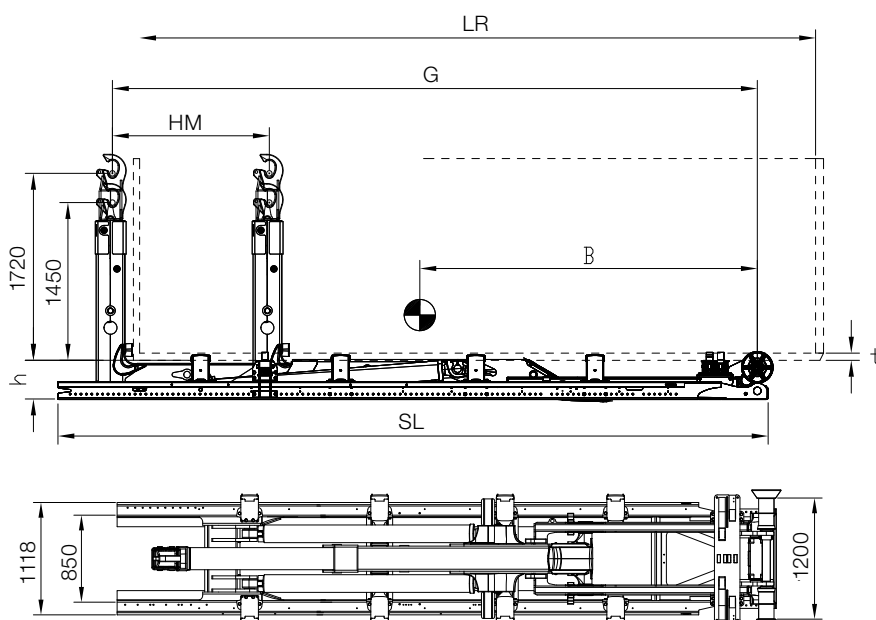

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local MULTILIFT dealer.

MULTILIFT equipments meet the demands set forth in the EU Machine Directive and they are CE marked. We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

BD-HIAB-XR21S-EN_150506

TECHNICAL INFORMATION

Sales contact

HIAB Australia
39-43 Deans Court
Dandenong South VIC 3175
AUSTRALIA

Phone (03) 8793 3400
Fax (03) 8793 3455
www.au.hiab.com