



HIAB XS 622

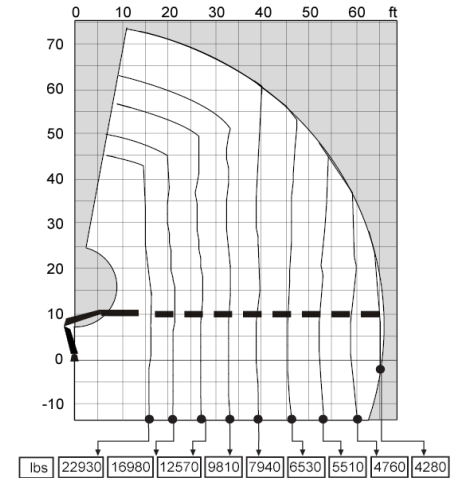

HIAB XS 622 BASIC DATA

TECHNICAL DATA	EP-3	EP-4	EP-5	EP-6	E-7	E-8	E-9
Max. lifting capacity (ft-lbs)	379 140	372 480	365 100	360 690	355 480	348 900	343 690
Outreach, hydraulic extensions (ft)	31' 6"	41' 0"	48' 7"	55' 5"	59' 1"	65' 11"	73' 0"
Outreach, manual extensions (ft)	-	-	-	-	-	-	-
Outreach / lifting capacity (ft-lbs)	6' 7" - 48 500	6' 7" - 48 500	6' 7" - 48 500	6' 7" - 48 500	6' 7" - 48 500	6' 7" - 48 500	6' 7" - 48 500
	16' 1" - 25 350	15' 9" - 25 570	16' 9" - 23 590	16' 9" - 23 370	16' 5" - 23 370	16' 5" - 22 930	16' 9" - 22 270
	21' 8" - 18 740	21' 0" - 18 740	22' 0" - 17 420	22' 0" - 17 200	21' 4" - 17 420	21' 4" - 16 980	22' 0" - 16 090
	27' 11" - 14 330	27' 3" - 14 330	28' 3" - 13 230	28' 3" - 12 790	27' 3" - 13 010	27' 3" - 12 570	27' 7" - 12 130
	34' 5" - 11 460	33' 10" - 11 240	34' 9" - 10 470	34' 9" - 10 140	33' 2" - 10 250	33' 2" - 9 810	33' 6" - 9 370
	-	40' 8" - 9 370	41' 8" - 8 600	41' 8" - 8 160	39' 1" - 8 380	39' 1" - 7 940	39' 4" - 7 500
	-	-	48' 3" - 7 390	48' 3" - 6 940	45' 7" - 6 940	45' 7" - 6 530	45' 11" - 6 130
	-	-	-	55' 5" - 6 040	52' 2" - 5 950	52' 2" - 5 510	52' 10" - 5 070
	-	-	-	-	59' 1" - 5 200	59' 1" - 4 760	59' 5" - 4 370
	-	-	-	-	-	65' 7" - 4 280	66' 3" - 3 840
	-	-	-	-	-	-	72' 10" - 3 480
Slewing angle (°)	∞	∞	∞	∞	∞	∞	∞
Height in folded position (in)	99	99	102	102	99	99	99
Width in folded position (in)	98	98	98	100	98	98	98
Installation space needed (in)	60	60	60	79	62	73	73
Weight, "standard" crane without stabilizers (lbs)	10 600	11 080	11 770	12 180	12 870	13 330	13 770
Weight, stabilizer equipment (lbs)	2 120 - 2 430	2 120 - 2 430	2 120 - 2 430	2 120 - 2 430	2 120 - 2 430	2 120 - 2 430	2 120 - 2 430

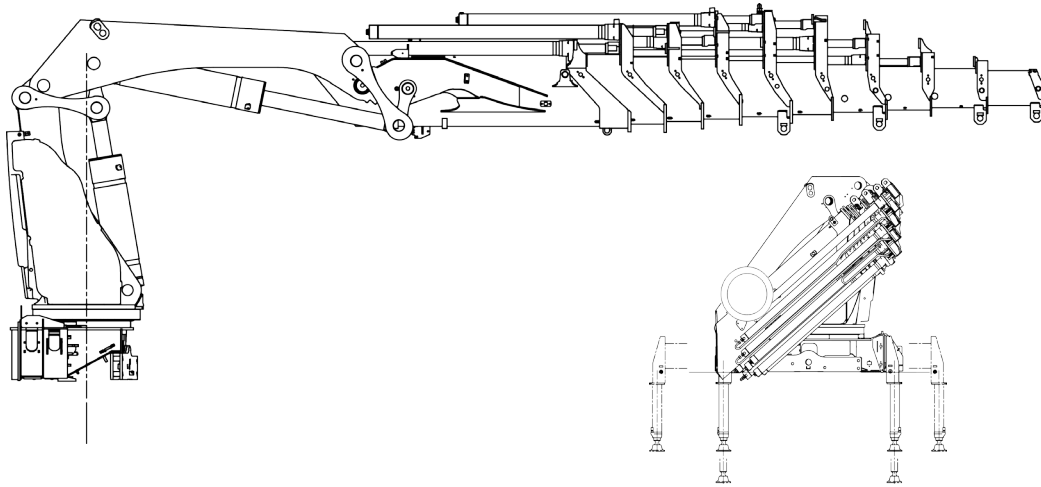

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001



V2015.05.14