

HIAB XS 022





BUILT TO PERFORM



HIAB XS 022 BASIC DATA

TECHNICAL DATA	D-1 HI DUO	D-2 HI DUO	D-3 HI DUO
Max. lifting capacity (ft-lbs)	18 880	18 310	17 730
Outreach, hydraulic extensions (ft)	15' 8"	20' 9"	25' 9"
Outreach, manual extensions (ft)	25' 7"	25' 7"	-
Outreach / lifting capacity (ft-lbs)	11' 6" - 1 630	11' 6" - 1 590	11' 10" - 1 460
	15' 5" - 1 230	15' 9" - 1 100	15' 9" - 1 040
	-	20' 4" - 860	20' 8" - 770
	-	-	25' 3" - 620
Slewing angle (°)	380	380	380
Height in folded position (in)	63	63	63
Width in folded position (in)	74	74	74
Installation space needed (in)	21	21	23
Weight, "standard" crane without stabilizers (lbs)	900	1 000	1 100
Weight, stabilizer equipment (lbs)	120	120	120
Weight, jib (lbs)	-	-	-

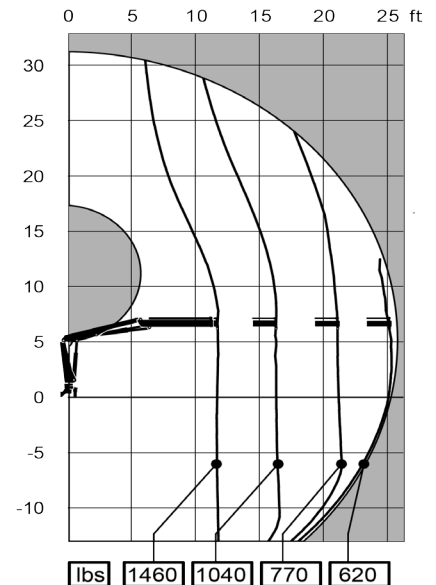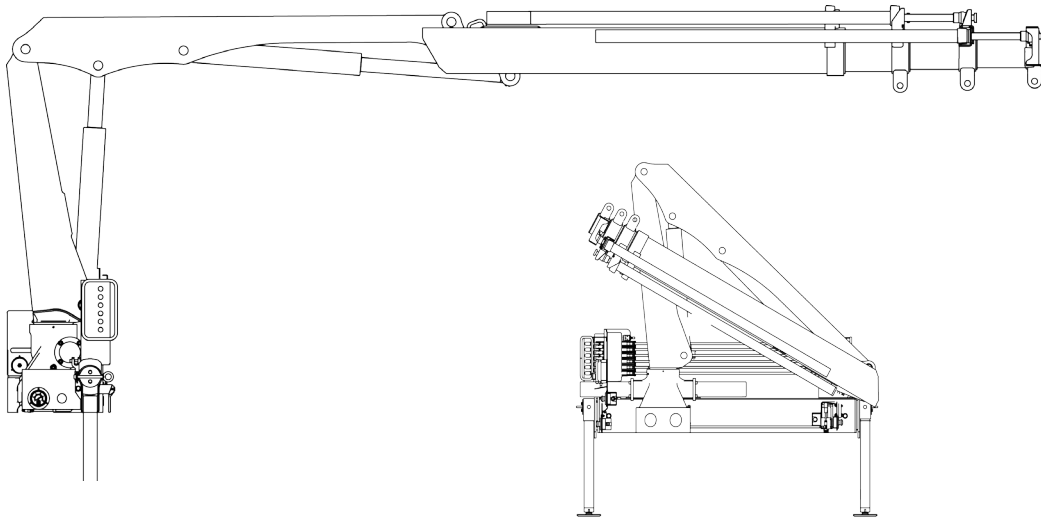

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001



hiab.us.com

V2015.05.12