

HIAB XS 055




BUILT TO PERFORM



HIAB XS 055 BASIC DATA

TECHNICAL DATA	B-1 HIDUO	B-2 HIDUO	D-3 HIDUO	D-4 HIDUO
Max. lifting capacity (ft-lbs)	38 350	33 210	33 930	31 690
Outreach, hydraulic extensions (ft)	17' 5"	23' 11"	30' 6"	37' 1"
Outreach, manual extensions (ft)	30' 6"	30' 6"	37' 1"	-
Outreach / lifting capacity (ft-lbs)	7' 7" - 5 070	8' 10" - 4 190	9' 6" - 3 790	10' 2" - 3 440
	12' 6" - 3 090	12' 6" - 2 910	13' 1" - 2 730	13' 5" - 2 650
	17' 9" - 2 160	17' 9" - 1 980	18' 1" - 1 940	18' 4" - 1 810
	-	23' 7" - 1 460	23' 11" - 1 410	23' 11" - 1 280
	-	-	30' 6" - 1 080	30' 6" - 950
	-	-	-	36' 9" - 770
Slewing angle (°)	410 - 410	410 - 410	410 - 410	410 - 410
Height in folded position (in)	75	75	75	75
Width in folded position (in)	82	85	85	85
Installation space needed (in)	22	22	26	26
Weight, "standard" crane without stabilizers (lbs)	1 610	1 790	1 940	2 090
Weight, stabilizer equipment (lbs)	230 - 350	230 - 350	230 - 350	230 - 350
Weight, jib (lbs)	-	-	-	-

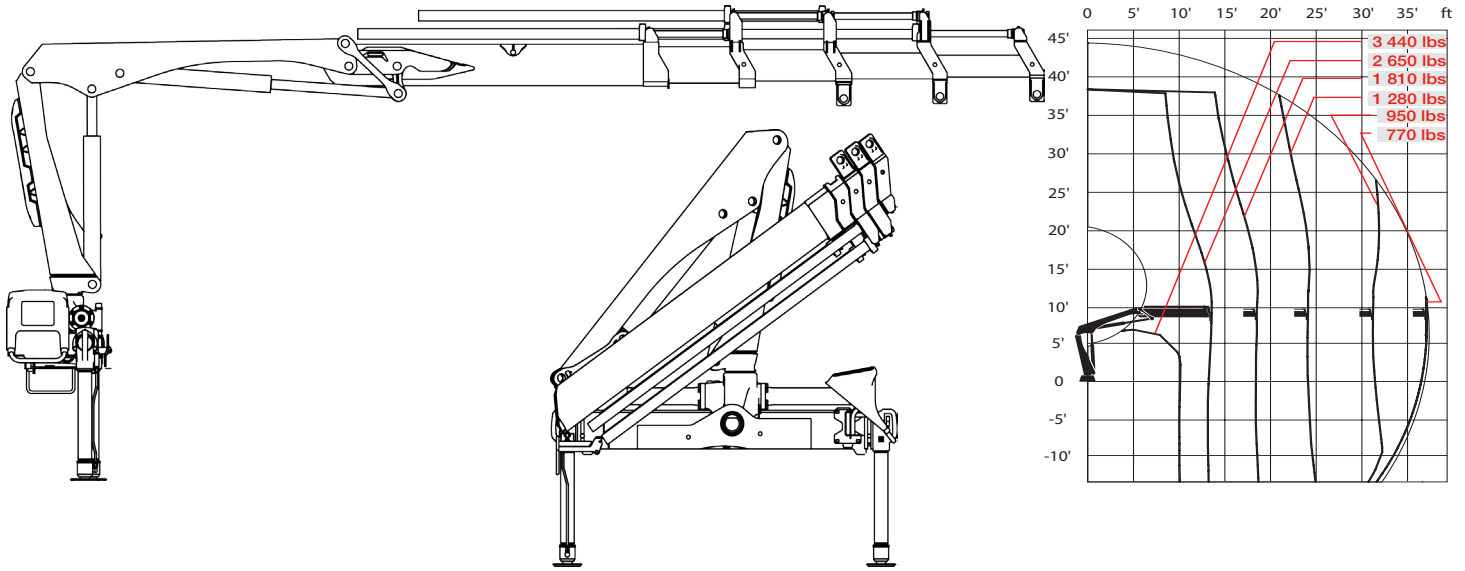

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001



V2015.05.14