
## HIAB X-HIPRO 192





## **HIAB X-HIPRO 192 BASIC DATA**

| TECHNICAL DATA                                     | ES-2            | E-3              | E-5             | E-6             |
|--|-----------------|------------------|-----------------|-----------------|
| Max. lifting capacity (ft-lbs)                     | 130 890         | 126 620          | 120 400         | 118 010         |
| Outreach, hydraulic extensions (ft)                | 27' 4"          | 35' 3"           | 49' 8"          | 57' 6"          |
| Outreach, manual extensions (ft)                   | 34' 3"          | 42' 5"           | 57' 6"          | 63' 5"          |
| Outreach, with jib (ft)                            | -               | -                | -               | -               |
| Outreach / lifting capacity (ft-lbs)               | 10' 2" - 12 790 | 10' 10" - 11 680 | 11' 2" - 10 800 | 11' 2" - 10 580 |
|  | 14' 5" - 9 040  | 15' 9" - 8 050   | 16' 1" - 7 390  | 16' 5" - 7 050  |
|  | 20' 4" - 6 390  | 21' 8" - 5 620   | 22' 0" - 5 110  | 22' 4" - 4 810  |
|  | 26' 11" - 4 810 | 28' 3" - 4 230   | 28' 7" - 3 660  | 28' 10" - 3 400 |
|  | -               | 34' 9" - 3 400   | 35' 1" - 2 870  | 35' 5" - 2 600  |
|  | -               | -                | 42' 0" - 2 290  | 42' 4" - 2 050  |
|  | -               | -                | 49' 3" - 1 940  | 49' 6" - 1 680  |
|  | -               | -                | -               | 57' 1" - 1 430  |
| Outreach / lifting capacity, with jib (ft-lbs)     | -               | -                | -               | -               |
| Slewing angle (°)                                  | 415             | 415              | 415             | 415             |
| Height in folded position (in)                     | 98              | 98               | 98              | 98              |
| Width in folded position (in)                      | 100             | 100              | 100             | 100             |
| Installation space needed (in)                     | 59              | 59               | 59              | 59              |
| Weight, "standard" crane without stabilizers (lbs) | 4 270           | 4 620            | 5 240           | 5500            |
| Weight, stabilizer equipment (lbs)                 | 600 - 940       | 600 - 940        | 600 - 940       | 600 - 940       |
| Weight, jib (lbs)                                  | -               | -                | -               | -               |

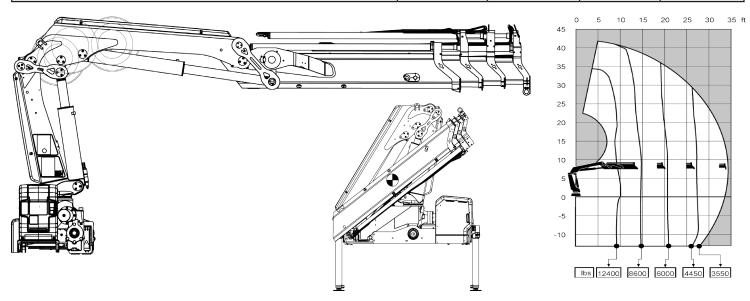

**Disclaimer.** Hiab cranes have been built to meet the highest standars of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com Hiab is part of Cargotec. www.cargotec.com

Hiab USA, Inc 12233 Williams Road Perrysburg, OH 43551 USA tel. +419 482 6000 fax. +419 482 6001

