


# HIAB 255K



# HIAB 255K BASIC DATA

| TECHNICAL DATA                                     | 255K-2 PRO      | 255K-2 HIPRO    | 255K-3 PRO     | 255K-3 HIPRO   |
|----------------------------------------------------|-----------------|-----------------|----------------|----------------|
| Max. lifting capacity (ft-lbs)                     | 166 710         | 180 670         | 156 360        | 170 400        |
| Outreach, hydraulic extensions (ft)                | 43' 4"          | 43' 4"          | 51' 2"         | 51' 2"         |
| Outreach, manual extensions (ft)                   | -               | -               | -              | -              |
| Outreach, with jib (ft)                            | -               | -               | -              | -              |
| Outreach / lifting capacity (ft-lbs)               | 26' 3" - 6 260  | 26' 3" - 6 720  | 26' 3" - 5 950 | 26' 3" - 6 440 |
|                                                    | 33' 10" - 4 720 | 33' 10" - 5 070 | 33' 6" - 4 370 | 33' 6" - 4 760 |
|                                                    | 42' 0" - 3 700  | 42' 0" - 4 060  | 41' 8" - 3 350 | 41' 8" - 3660  |
|                                                    | -               | -               | 49' 6" - 2 780 | 49' 6" - 3 040 |
|                                                    | -               | -               | -              | -              |
| Outreach / lifting capacity, with jib (ft-lbs)     | -               | -               | -              | -              |
| Slewing angle (°)                                  | 450             | 450             | 450            | 450            |
| Height in folded position (in)                     | 113             | 113             | 113            | 113            |
| Width in folded position (in)                      | 98              | 98              | 98             | 98             |
| Installation space needed (in)                     | 33              | 33              | 33             | 33             |
| Weight, "standard" crane without stabilizers (lbs) | 7 740           | 7 830           | 8 220          | 8 310          |
| Weight, stabilizer equipment (lbs)                 | 1 290           | 1 290           | 1 290          | 1 290          |
| Weight, jib (lbs)                                  | -               | -               | -              | -              |

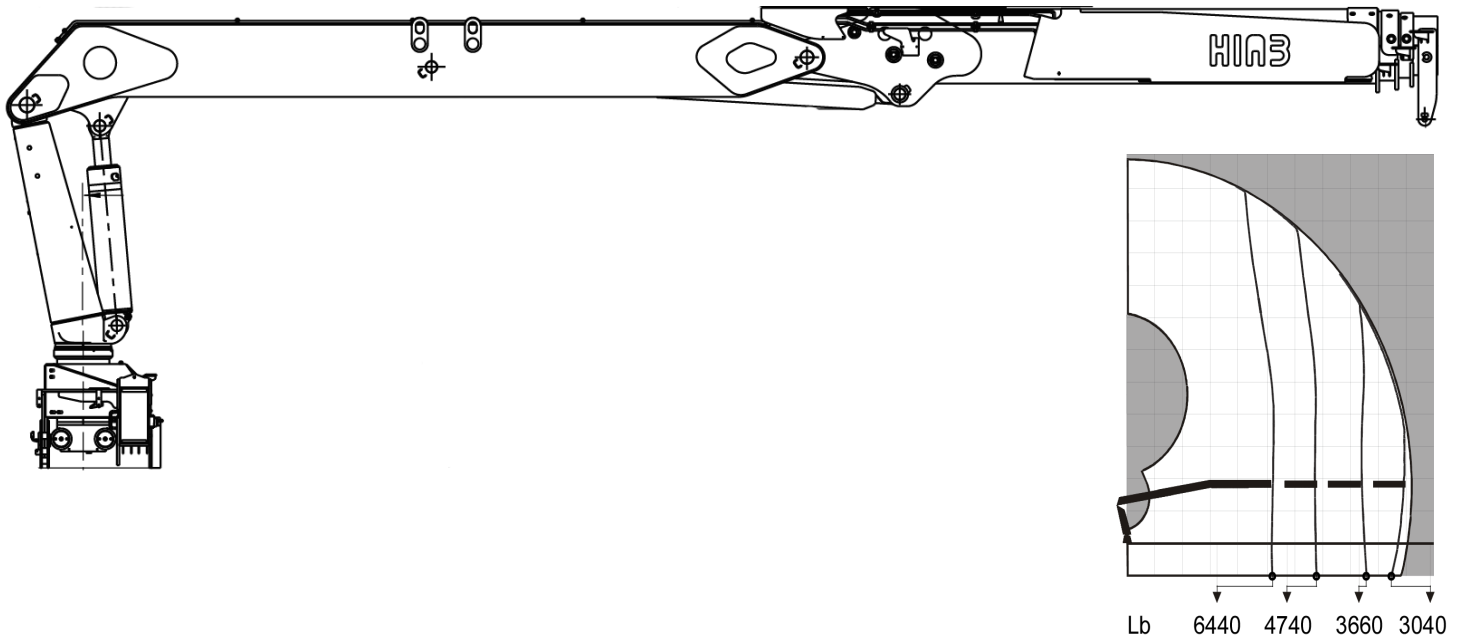

**Disclaimer.** Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

**Hiab** is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com  
Hiab is part of Cargotec.  
www.cargotec.com

Hiab USA, Inc  
12233 Williams Road  
Perrysburg, OH 43551 USA  
tel. +419 482 6000  
fax. +419 482 6001

