



HIAB 166L

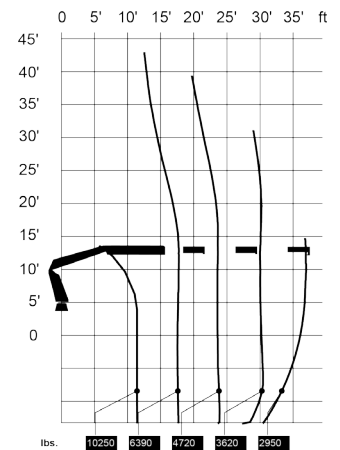

HIAB 166L BASIC DATA

TECHNICAL DATA	L-3 PRO	L-3 HIPRO
Max. lifting capacity (ft-lbs)	115 260	120 540
Outreach, hydraulic extensions (ft)	38' 9"	38' 9"
Outreach, manual extensions (ft)	61' 4"	61' 4"
Outreach, with jib (ft)	-	-
Outreach / lifting capacity (ft-lbs)	11' 10" - 9 810	11' 10" - 10 250
	18' 8" - 6 130	18' 8" - 6 390
	24' 7" - 4 500	24' 7" - 4 720
	31' 2" - 3 440	31' 2" - 3 620
	37' 9" - 2 820	37' 9" - 2 950
Outreach / lifting capacity (ft-lbs), manual extensions	44' 11" - 2 250	44' 11" - 2 340
	52' 10" - 1 760	52' 10" - 1 850
	60' 4" - 1 410	60' 4" - 1 540
Outreach / lifting capacity, with jib (ft-lbs)	-	-
Slewing angle (°)	406	406
Height in folded position (in)	-	-
Width in folded position (in)	-	-
Installation space needed (in)	-	-
Weight, "standard" crane without stabilizers (lbs)	4 590	4 670
Weight, stabilizer equipment (lbs)	560 - 860	560 - 860
Weight, jib (lbs)	-	-

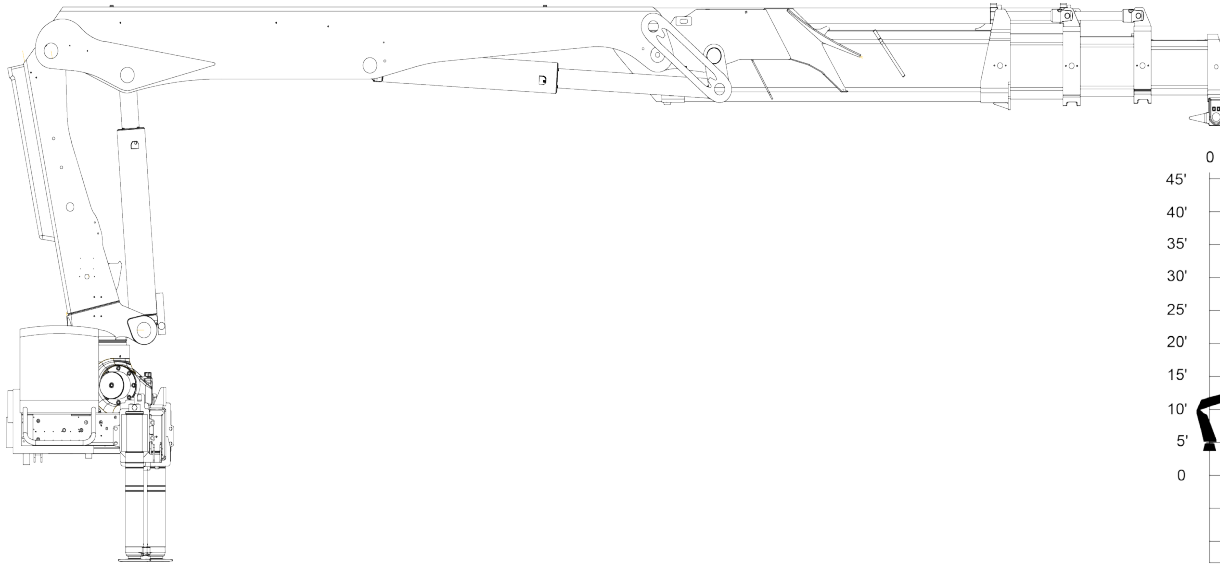

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001



V2015.05.14