

HIAB XS 088





BUILT TO PERFORM



HIAB XS 088 BASIC DATA

TECHNICAL DATA	B-1 HIU00	B-2 HIU00	B-3 HIU00	E-3 HIU00	E-4 HIU00	E-5 HIU00
Max. lifting capacity (ft-lbs)	61 940	58 970	56 800	58 970	56 800	52 380
Outreach, hydraulic extensions (ft)	18' 8"	25' 3"	31' 10"	31' 2"	38' 1"	44' 11"
Outreach, manual extensions (ft)	31' 10"	38' 9"	38' 9"	44' 11"	44' 11"	-
Outreach / lifting capacity (ft-lbs)	8' 10" - 7 050	9' 6" - 6 390	10' 2" - 5 840	6' 11" - 8 160	7' 3" - 7 720	7' 3" - 7 170
	12' 6" - 4 960	12' 6" - 4 630	12' 10" - 4 410	13' 5" - 4 370	13' 9" - 4 100	14' 1" - 3 880
	17' 9" - 3 530	17' 9" - 3 260	18' 1" - 3 000	18' 8" - 3 000	19' 0" - 2 780	19' 4" - 2 600
	-	23' 11" - 2 380	23' 11" - 2 200	24' 11" - 2 160	25' 3" - 1 980	25' 7" - 1 760
	-	-	30' 2" - 1 680	31' 2" - 1 720	31' 6" - 1 500	31' 10" - 1 320
	-	-	-	-	38' 1" - 1 230	38' 5" - 1 060
	-	-	-	-	-	44' 11" - 880
Slewing angle (°)	190 - 406	190 - 406	190 - 406	190 - 406	190 - 406	190 - 406
Height in folded position (in)	79	79	79	79	79	79
Width in folded position (in)	87	91	94	94	91	94
Installation space needed (in)	31	31	34	36	33	35
Weight, "standard" crane without stabilizers (lbs)	2 140	2 380	2 580	2 580	2 780	2 950
Weight, stabilizer equipment (lbs)	340 - 660	340 - 660	340 - 660	340 - 660	340 - 660	340 - 660
Weight, jib (lbs)	-	-	-	-	-	-

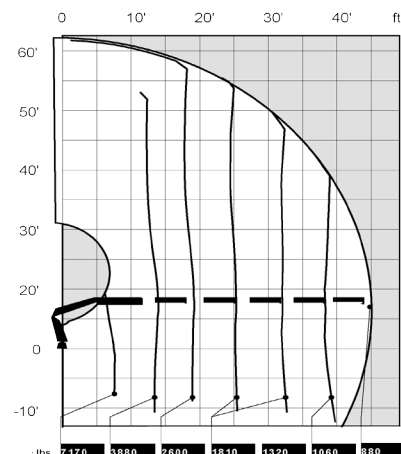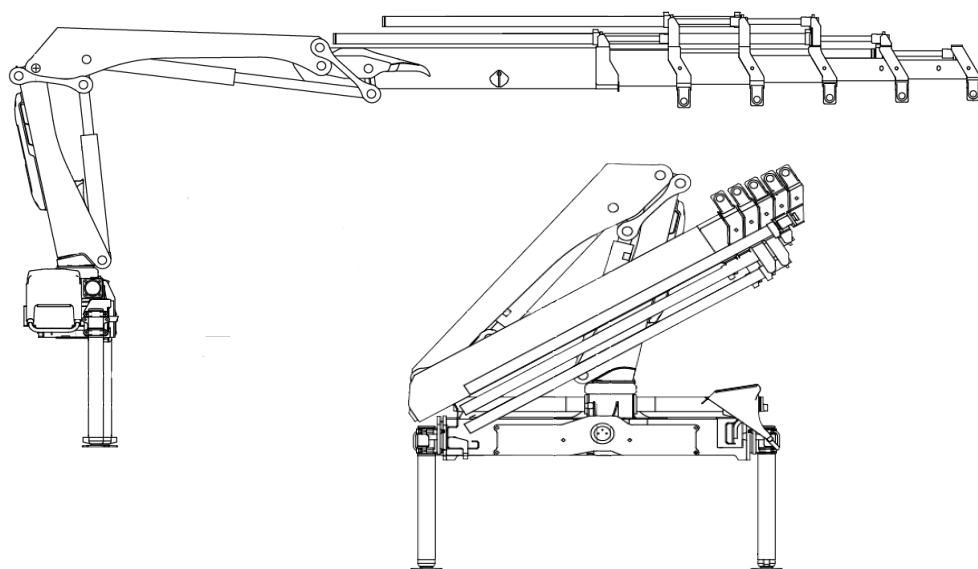

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001

