



HIAB XS 322

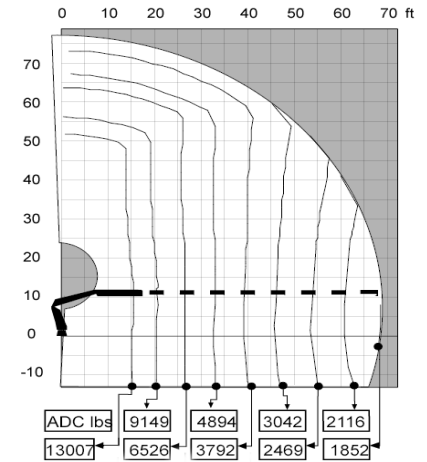

HIAB XS 322 BASIC DATA

TECHNICAL DATA	EP-3	EP-4	E-5	EP-6	E-7	E-8
Max. lifting capacity (ft-lbs)	214 600	210 190	206 500	209 470	205 780	202 810
Outreach, hydraulic extensions (ft)	33' 10"	41' 8"	49' 6"	53' 2"	61' 0"	68' 11"
Outreach, manual extensions (ft)	49' 6"	57' 1"	57' 5"	65' 11"	71' 6"	74' 2"
Outreach / lifting capacity (ft-lbs)	9' 2" - 22 050	9' 2" - 22 050	8' 10" - 22 050	10' 2" - 20 060	10' 2" - 19 620	10' 2" - 19 400
	14' 1" - 15 210	14' 5" - 14 550	14' 9" - 13 890	14' 9" - 14 110	15' 1" - 13 670	15' 5" - 13 010
	19' 8" - 10 690	20' 0" - 10 140	20' 4" - 9 700	20' 0" - 9 920	20' 4" - 9 480	20' 8" - 9 150
	26' 3" - 7 940	26' 7" - 7 500	26' 11" - 7 050	25' 11" - 7 280	26' 3" - 6 830	26' 7" - 6 530
	33' 6" - 6 170	33' 10" - 5 730	34' 1" - 5 340	32' 2" - 5 600	32' 6" - 5 200	32' 10" - 4 890
	-	41' 4" - 4 630	41' 8" - 4 280	38' 9" - 4 450	39' 1" - 4 100	39' 4" - 3 790
	-	-	49' 3" - 3 570	45' 7" - 3 700	45' 11" - 3 310	46' 3" - 3 040
	-	-	-	52' 10" - 3 130	53' 2" - 2 780	53' 6" - 2 470
	-	-	-	-	60' 8" - 2 380	61' 0" - 2 120
	-	-	-	-	-	68' 7" - 1 850
Slewing angle (°)	420	420	420	420	420	420
Height in folded position (in)	94	94	94	94	94	94
Width in folded position (in)	98	98	98	98	98	98
Installation space needed (in)	47	49	49	52	50	50
Weight, "standard" crane without stabilizers (lbs)	6 970	7 430	7 780	8 330	8 710	8 970
Weight, stabilizer equipment (lbs)	1 080 - 1 280	1 080 - 1 280	1 080 - 1 280	1 080 - 1 280	1 080 - 1 280	1 080 - 1 280
Weight, jib (lbs)	-	-	-	-	-	-

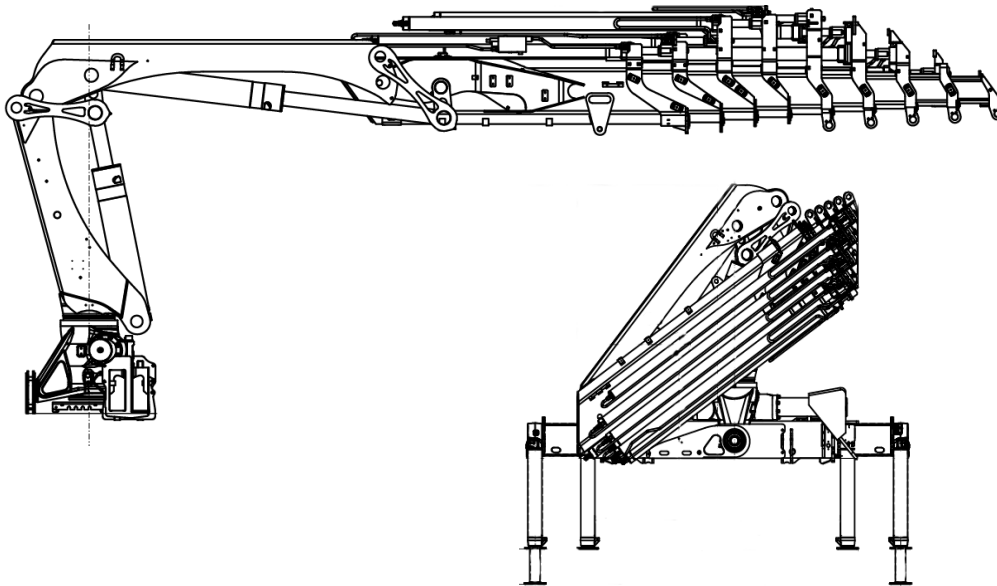

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001

