



HIAB XS 422

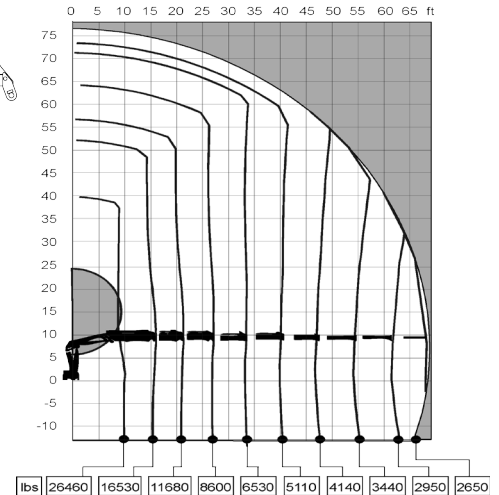

HIAB XS 422 BASIC DATA

TECHNICAL DATA	EP-3	EP-4	E-5	EP-6	E-7	E-8
Max. lifting capacity (ft-lbs)	286 160	281 750	278 060	270 680	266 270	261 850
Outreach, hydraulic extensions (ft)	36' 1"	43' 4"	46' 11"	54' 2"	61' 4"	68' 3"
Outreach, manual extensions (ft)	-	-	54' 2"	66' 3"	74' 6"	75' 6"
Outreach / lifting capacity (ft-lbs)	10' 6" - 26 460	10' 6" - 26 460	9' 10" - 26 460	9' 10" - 26 460	9' 6" - 26 460	9' 6" - 26 460
	16' 1" - 17 860	16' 1" - 17 420	16' 1" - 17 200	16' 1" - 16 760	16' 1" - 16 530	15' 9" - 16 530
	22' 4" - 12 570	22' 4" - 12 350	21' 4" - 12 570	21' 4" - 12 130	21' 4" - 11 900	21' 0" - 11 680
	28' 10" - 9 590	28' 10" - 9 260	27' 3" - 9 480	27' 7" - 8 930	27' 7" - 8 600	26' 11" - 8 600
	36' 1" - 7 720	36' 1" - 7 390	33' 6" - 7 500	33' 6" - 7 050	33' 6" - 6 720	33' 2" - 6 530
	-	43' 4" - 6 080	40' 0" - 6 080	40' 0" - 5 690	40' 0" - 5 380	39' 8" - 5 110
	-	-	46' 11" - 5 160	46' 11" - 4 760	46' 11" - 4 410	46' 7" - 4 140
	-	-	-	54' 2" - 4 060	54' 2" - 3 700	53' 10" - 3 440
	-	-	-	-	61' 4" - 3 260	61' 0" - 2 950
	-	-	-	-	-	68' 3" - 2 650
Slewing angle (°)	400	400	400	400	400	400
Height in folded position (in)	99	99	95	95	95	95
Width in folded position (in)	98	98	98	98	98	98
Installation space needed (in)	56	67	56	57	58	59
Weight, "standard" crane without stabilizers (lbs)	8 600	9 060	9 590	10 010	10 360	10 670
Weight, stabilizer equipment (lbs)	1 370 - 1 830	1 370 - 1 830	1 370 - 1 830	1 370 - 1 830	1 370 - 1 830	1 370 - 1 830
Weight, jib (lbs)	-	-	-	-	-	-

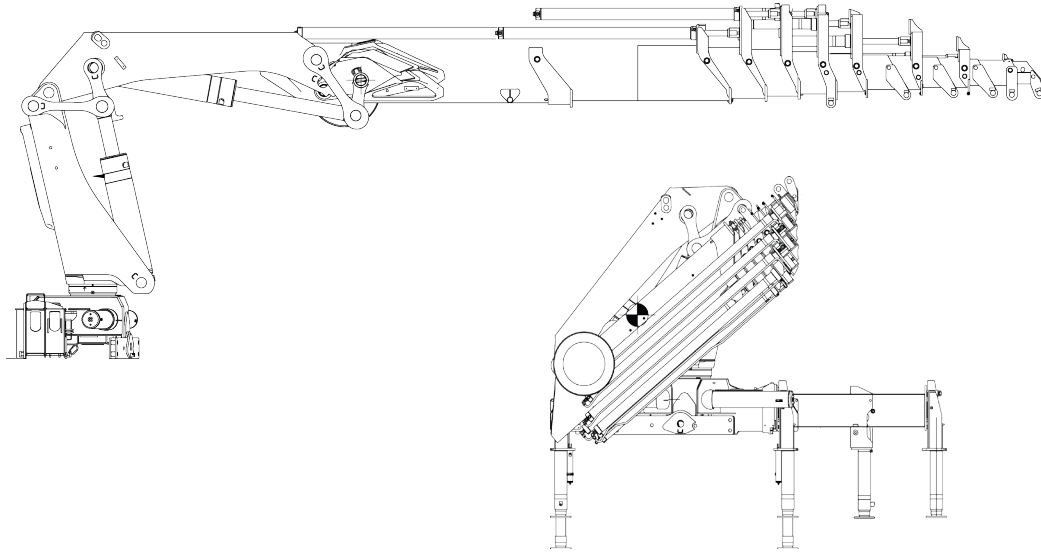

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001

