



HIAB XS 477

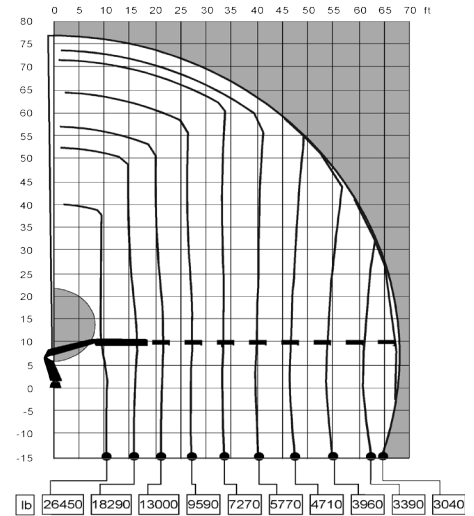

HIAB XS 477 BASIC DATA

TECHNICAL DATA	EP-3	EP-4	E-5	E-6	E-7	E-8
Max. lifting capacity (ft-lbs)	311 270	306 860	300 920	296 510	291 996	287 680
Outreach, hydraulic extensions (ft)	36' 1"	43' 4"	46' 11"	54' 2"	61' 4"	68' 3"
Outreach, manual extensions (ft)	-	-	54' 2"	66' 3"	74' 6"	75' 6"
Outreach / lifting capacity (ft-lbs)	10' 10" - 26 460	10' 10" - 26 460	10' 6" - 26 460	10' 6" - 26 460	10' 2" - 26 460	10' 2" - 26 460
	16' 1" - 18 740	16' 1" - 18 520	16' 1" - 18 080	16' 1" - 17 860	16' 1" - 17 640	15' 9" - 17 640
	22' 4" - 13 450	22' 4" - 13 010	21' 4" - 13 230	21' 4" - 13 010	21' 4" - 12 570	21' 0" - 12 570
	28' 10" - 10 140	28' 10" - 9 920	27' 3" - 10 030	27' 7" - 9 480	27' 7" - 9 260	26' 11" - 9 150
	36' 1" - 8 160	36' 1" - 7 830	33' 6" - 7 940	33' 6" - 7 610	33' 6" - 7 280	33' 2" - 7 050
	-	43' 4" - 6 440	40' 0" - 6 530	40' 0" - 6 130	40' 0" - 5 780	39' 8" - 5 560
	-	-	46' 11" - 5 510	46' 11" - 5 110	46' 11" - 4 760	46' 7" - 4 500
	-	-	-	54' 2" - 4 370	54' 2" - 4 010	53' 10" - 3 750
	-	-	-	-	61' 4" - 3 530	61' 0" - 3 260
	-	-	-	-	-	68' 3" - 2 870
Slewing angle (°)	400	400	400	400	400	400
Height in folded position (in)	99	99	95	95	95	95
Width in folded position (in)	98	98	98	98	98	98
Installation space needed (in)	56	62	56	57	58	59
Weight, "standard" crane without stabilizers (lbs)	8 710	9 150	9 680	10 100	10 450	10 760
Weight, stabilizer equipment (lbs)	1 410 - 1 850	1 410 - 1 850	1 410 - 1 850	1 410 - 1 850	1 410 - 1 850	1 410 - 1 850
Weight, jib (lbs)	-	-	-	-	-	-

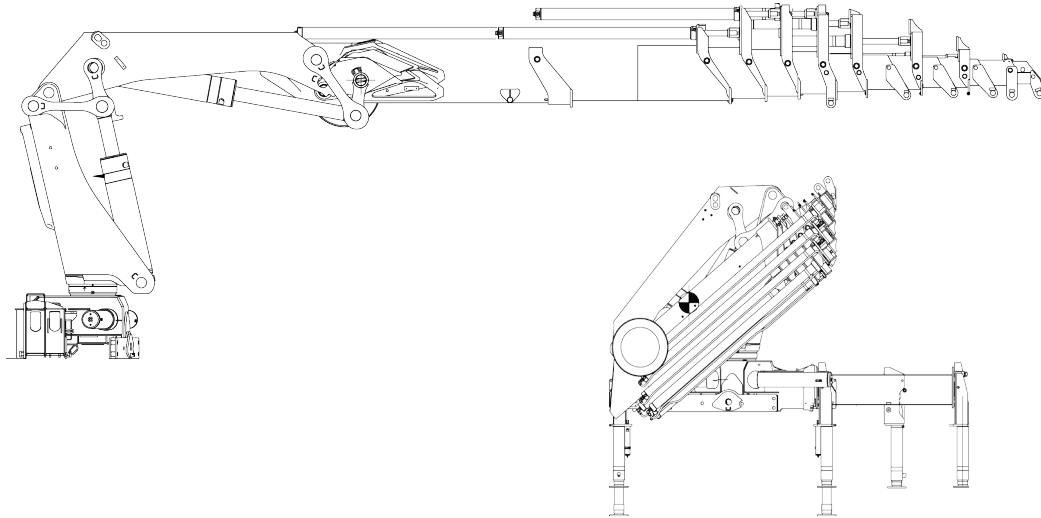

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA, Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001



V2015.05.14